


Product properties			
Format	2200 x 185 x 11.5 mm	2380 x 233 x 11.5 mm	
Top layer	≥ 2.5 mm		
Packaging	Pack:	10 Elements 4.07 m ² / 29.30 kg	7 Elements 3.882 m ² / 24.000 kg
	Pallet:	32 Packs 130.24 m ² / 937.60 kg	36 Packs 139.752 m ² / 860.000 kg
Guarantee (according to Parador guarantee conditions)		15 years (domestic area)	
Notes	- cleaning and maintenance see instructions - technical changes reserved		

Product labelling

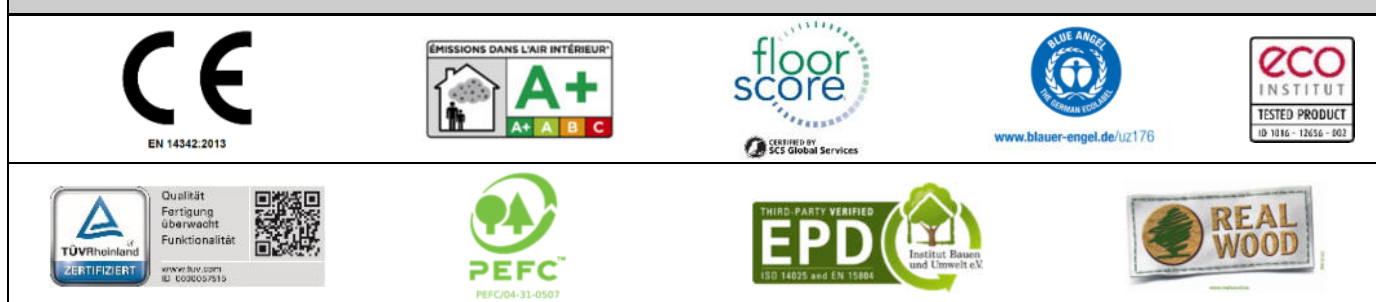

Tolerances (EN 13489)

Admissible difference in length (± 0.1 %)	± 0.05 %
Admissible difference in width (± 0.2 mm)	± 0.1 mm
Squareness of the elements (≤ 0.2 %)	≤ 0.05 %
Longitudinal curvature along the element (≤ 0.1 %)	≤ 0.05 %
Transverse curvature across the width (≤ 0.2 %)	≤ 0.08 %
Height differences of elements (≤ 0.2 mm)	≤ 0.18 mm
Moisture content at the time of first delivery (5-9%)	6 – 8 %

Classification general product features

	Test method	Rating
Resistance to roller castor chairs	EN 425	We recommend the use of a conventional chairmat
Moving a furniture leg	EN 424	No visible changes
Thermal resistance Suitable for installation over underfloor heating when using an appropriate underlay and moisture barrier.	EN 12664	0.077 m ² *K/W
Formaldehyde (E1 = 0.1 ppm)	EN 717-1	≤ 0.05 ppm
Acoustical - Impact noise reduction	ISO 717-2	14 dB (with Akustik-Protect 100)
Disposal		EAK-Code-number 20 01 38

Classification surface characteristics

	Test method	Rating	
		Lacquer	Natural oiled
Slip resistance	EN 13893	μ ≥ 0.47	μ ≥ 0.47
	CEN/TS 15676	29 SRT (SRV wet)	46 SRT (SRV wet)
		51 SRT (SRV dry)	103 SRT (SRV dry)
Reaction to fire	EN 13501-1	D _{fl} s1	
	EN 13501-1	D _{fl} s1	
Chemical resistance	EN 13442	Category 5	Category 4
Bond strength / Cross cutting test	ISO 2409	0	n.n.
Slip resistance, inclined plane	DIN 51130	R 9	R 10

Changed:	QMB	File name:	PA_TDS_Parkett_Basic_EN_20210201
Date:	01.08.2013	Latest update at:	www.parador.eu/service/catalogues-downloads/technical-data-sheets
Our technical data sheets are constantly updated and adapted to the latest technology. This version replaces all earlier versions and is valid from:			01.02.2021

Free sorting according to EN 13489									
Assortment:	Block								
Characteristics according to EN 1310:	Upper side of the lamella								
Type of wood:	Canadian maple	European maple	Beech		Oak			European cherry	American walnut
Botanical designation / Code (EN 13556):	Acer saccharum Marsh. / ACSC	Acer pseudoplatanus L. / ACPS	Fagus sylvatica L. / FASY		Quercus petraea Liebl., Quercus robur L. / QCXE			Prunus avium L. / PRAV	Juglans nigra L. / JNGG
Shortcut / grade / date (internal):	ER-L-AHC	ER-L-BAH	ER-L-BU		ER-L-EI			ES-L-KIR	ER-L-SWN
	Version 6 2012	Version 6 2012	Version 7 2014		Version 25 2020			Version 4 2012	Version 7 2012
	A2	A4	A2	A4	A2	A4	N4	A4	A4
Grade:	Nature	Rustique	Nature	Rustique	Nature	Rustique	Living	Rustique	Rustique
Sound sapwood	-	-	-	-	not permitted	permitted	permitted	permitted	Permitted
Knot (intergrown)	permitted: up to 15 mm	permitted: up to 30 mm	permitted: up to 15 mm	permitted: up to 20 mm	permitted: up to 15 mm	permitted: up to 20 mm	permitted: up to 30 mm	permitted: up to 30 mm	permitted: up to 30 mm
Falling out knot	not permitted	not permitted	not permitted		permitted: up to 10 mm	permitted: up to 20 mm	permitted: up to 20 mm	not permitted	not permitted
Pinkknots	permitted	permitted	permitted		permitted			permitted	Permitted
Filling	permitted	permitted	permitted		permitted			permitted	permitted
Slight cracks / hairline cracks	not permitted	not permitted	not permitted		not permitted			not permitted	Permitted
Sugar inclusions, mineral inclusions	permitted	-	-		-			-	-
Bark pocket	not permitted	not permitted	not permitted		not permitted			not permitted	not permitted
Lightning cracks	not permitted	permitted	permitted		not permitted	permitted		-	permitted
Slope of grain	no criterion	no criterion	no criterion		no criterion			no criterion	no criterion
Healthy heart	permitted	permitted	permitted		-			-	-
Medullary ray	permitted	permitted	permitted		permitted			permitted	-
Discoloration, colour variation	permitted: all colours, slight discoloration	permitted: all colours, green stripes	permitted: all colours, slight blue stain		permitted: all colours, slight discoloration	permitted: all colours, discoloration		permitted: all colours	permitted: all colours, slight discoloration
White streaks	-	-	-		not permitted	permitted		-	-
Pilling sticks marking	not permitted	not permitted	not permitted		not permitted			not permitted	not permitted
Biodeterioration (EN 1311)	not permitted	not permitted	not permitted		not permitted			not permitted	not permitted
Non-visible parts									
All features without restrictions to size or quantity permitted, provided they do not affect the strength or durability of the floor.									
Comment									
Maximum 3% of lamellas are allowed in the next lower grading. Wood is a natural product and therefore different in colour and texture. Samples, brochures and photos are therefore only approximate and not binding. The action of sunlight affects the natural variation in wood shade. This allows the product present at the time of delivery of significant differences to master.									

Changed:	QMB	File name:	PA_TDS_Parkett_Basic_Anhang_EN_20210201
Date:	01.08.2013	Latest update at:	www.parador.eu/service/catalogues-downloads/technical-data-sheets
Our technical data sheets are constantly updated and adapted to the latest technology. This version replaces all earlier versions and is valid from:			
			01.01.2021
			Page 1 of 3

Free sorting according to EN 13489		
Assortment:	Wide plank	
Characteristics according to EN 1310:	Upper side of the floor board	
Type of wood:	Oak	
Botanical designation / Code (EN 13556):	Quercus petraea Liebl., Quercus robur L. / QCXE	
Shortcut / grade / date (internal):	ER-LH-EI	
	Version 3 2019	Version 10 2019
	N3	N7
Grade:	Classic	Rustique
Sound sapwood	not permitted	permitted
Knot (intergrown)	permitted: up to 30 mm	permitted: up to 80 mm
Falling out knot	permitted: up to 25 mm	permitted: up to 60 mm
Pinkknots	permitted: cluster of knots	
Filling	permitted	
Slight cracks / hairline cracks	permitted	
Sugar inclusions, mineral inclusions	-	
Bark pocket	not permitted	permitted
Lightning cracks	permitted	
Slope of grain	no criterion	
Healthy heart	permitted	
Medullary ray	permitted	
Discoloration, colour variation	permitted: slight colour variations	permitted: all colours
White streaks	permitted	
Pilling sticks marking	not permitted	
Biodeterioration (EN 1311)	not permitted	
Non-visible parts		
All features without restrictions to size or quantity permitted, provided they do not affect the strength or durability of the floor.		
Comment		
Maximum 3% of lamellas are allowed in the next lower grading. Wood is a natural product and therefore different in colour and texture. Samples, brochures and photos are therefore only approximate and not binding. The action of sunlight affects the natural variation in wood shade. This allows the product present at the time of delivery of significant differences to master.		

Changed:	QMB	File name:	PA_TDS_Parkett_Basic_Anhang_EN_20210201
Date:	01.08.2013	Latest update at:	www.parador.eu/service/catalogues-downloads/technical-data-sheets
Our technical data sheets are constantly updated and adapted to the latest technology. This version replaces all earlier versions and is valid from:		01.01.2021	Page 2 of 3

Free sorting according to EN 13489		
Assortment:	Extra-sized wideplank	
Characteristics according to EN 1310:	Upper side of the floor board	
Type of wood:	Oak	
Botanical designation / Code (EN 13556):	Quercus petraea Liebl., Quercus robur L. / QCXE	
Shortcut / grade / date (internal):	ER-LH-EI-N3	ER-LH-EI-N6-N7
	Version 3 2019	Version 10 2019
	N3	N7
Grade:	Classic	Rustique
Sound sapwood	not permitted	permitted
Knot (intergrown)	permitted: up to 30 mm	permitted: up to 80 mm
Falling out knot	permitted: up to 25 mm	permitted: up to 60 mm
Pinkknots	permitted: cluster of knots	
Filling	permitted	
Slight cracks / hairline cracks	permitted	
Sugar inclusions, mineral inclusions	-	
Bark pocket	not permitted	permitted
Lightning cracks	permitted	
Slope of grain	no criterion	
Healthy heart	permitted	
Medullary ray	permitted	
Discoloration, colour variation	permitted: slight colour variations	permitted: all colours
White streaks	permitted	
Pilling sticks marking	not permitted	
Biodeterioration (EN 1311)	not permitted	
Non-visible parts		
All features without restrictions to size or quantity permitted, provided they do not affect the strength or durability of the floor.		
Comment		
Maximum 3% of lamellas are allowed in the next lower grading. Wood is a natural product and therefore different in colour and texture. Samples, brochures and photos are therefore only approximate and not binding. The action of sunlight affects the natural variation in wood shade. This allows the product present at the time of delivery of significant differences to master.		

Changed:	QMB	File name:	PA_TDS_Parkett_Basic_Anhang_EN_20210201
Date:	01.08.2013	Latest update at:	www.parador.eu/service/catalogues-downloads/technical-data-sheets
Our technical data sheets are constantly updated and adapted to the latest technology. This version replaces all earlier versions and is valid from:			01.01.2021
			Page 3 of 3